



*Shenzhen Sunlight Electronic CO., LTD*

# 承認書

## SPECIFICATION FOR APPROVAL

DOE VI AC DC Adapter 24V 0.7A Power Supply Switching 700mA 24 Volt Adaptor

**CUSTOMER:** \_\_\_\_\_

**DESCRIPTION:** ADAPTER

**SPECS:** 24V700MA AC/DC ADAPTER

**MODEL NO.:** GA240007

**DATE:** Feb-26-2015

<b>APPROVAL SIGNATURE</b>		
<b>DATE:</b>	<b>DATE:</b>	<b>DATE:</b>

**PLEASE RETURN TO US ONE COPY OF “SPECIFICATION FOR APPROVAL” WITH YOUR APPROVED SIGNATURE**

**ADD : A Area, 3F , Building B, Xinshidai Gongrong Industrial Area, NO.2, Shihuan Road, Shilong Community , Shiyan Streets, Bao’an District, Shenzhen City, Guangdong.**

**web : [www.itxpower.net](http://www.itxpower.net)**

**mail : [15015139704@163.com](mailto:15015139704@163.com)**

# Shenzhen Sunlight Electronic CO.,LTD

## SPECIFICATION FOR APPROVAL

### CONTENT OF APPROVAL SHEET :

1. REVISION CONTROL LIST	-----	3
2. FEATURE	-----	4
3. INPUT	-----	4
4. OUTPUT	-----	4
5. PROTECTION	-----	4~5
6. SAFETY AND EMI REQUIREMENT	-----	5~6
7. OPERATION & ENVIRONMENT PERFORMANCE	-----	6~7
8. MECHANICAL REQUIREMENT	-----	7
9. PRODUCT GUARANTEE	-----	7
10. PRODUCT OUTLINE DRAWING	-----	8
11. DC OUTPUT CORD DRAWING	-----	9
12. RATING LABEL DRAWING	-----	10
13. PCB LAYOUT :	-----	11
14. TEST REPORT	-----	12
15. PACKING DRAWING	-----	13
16. LICENSE	-----	14~15

# Shenzhen Sunlight Electronics CO.,LTD

## SPECIFICATION FOR APPROVAL

### 1. REVISION CONTROL LIST :

<b>REVISION CONTROL LIST</b>				
REV.	Descriptions Of Change		Changed Date :	ECN NO.
	Before	After		

ITXPOWER.NET

# Shenzhen Sunlight Electronic CO.,LTD

## SPECIFICATION FOR APPROVAL

### 2. FEATURE :

- INPUT : UNIVERSAL 100-240 Vac/50-60 Hz INPUT, WITHOUT ANY SLIDE SWITCH
- OUTPUT : +24.0V / 0-0.7A
- DIMENSION : 81.5(D)\*50.0(W)\*34.5(T)
- EFFICIENCY : 85% TYPICAL
- SAFETY : UL/CB/GS/SAA/PSE/LVD/CCC
- EMI : FCC CLASS B / EN55022 CLASS B; CONDUCTED & RADIATED MEETED
- HIGH FREQUENCY DESIGN, LESS POWER CONSUMPTION
- OVER VOLTAGE PROTECTION, SHORT CIRCUITED PROTECTION, OVER POWER PROTECTION
- CAN BE USED AT TELCOMMUNICATION, COMPUTER, INDUSTRIAL CONTORLLER & OA SYSTEM

### 3. INPUT :

3.1 VOLTAGE	UNIVERSAL 100~240Vac,SINGLE PHASE
3.2 FREQUENCY	50HZ~60HZ
3.3 CURRENT	1.0A Max
3.4 INRUSH CURRENT	20A Max/110Vac;40A Max/240Vac (COLD STABT AT 25°C FULL LOAD)
3.5 EFFICIENCY	85% TYPICAL (AT NOMINAL LINE VOLTAGE FULL LOAD)
3.6 INPUT POWER DISSIPATION	UNDER 0.1W < ZERO LOAD 115V/60HZ INPUT
	UNDER 0.1W < ZERO LOAD 230V/50HZ INPUT

### 4. OUTPUT :

4.1 DC OUTPUT	VOLTAGE	+24.0V
	CURRENT	0.7A Max
	REGULATION	22.80V Min~24.0V Typ.~25.20V Max
	RIPPLE & NOISE	240mV Max
	TOTAL POWER	16.8W Max

NOTE : FOR RIPPLE & NOISE MEASUREMENT, USE A 20MHZ BAND WIDTH FREQUENCY OSCILLOSCOPF, AND ADD A 0.1uF MULTILAYER CAP. AND A LOW ESR ELECTROLYTICCAP. (10uF) AT OUTPUT CONNECTOR TERMINALS. (AT NOMINAL LINE VOLTAGE FULL LOAD)

### 5. PROTECTION :

5.1 OVER VOLTAGE PROTECTION	26.2V MAX. The power supply shall be hiccupped when output voltage reaches to its over voltage protection trigger point.
5.2 SHORT CIRCUIT PROTECTION	The power supply shall be hiccupped when operating any output in a short circuit condition.

# Shenzhen Sunlight Electronic CO.,LTD

## SPECIFICATION FOR APPROVAL

5.3 OVER POWER PROTECTION	The adapter provide protection at 120%~200% of rated output power, the adapter shall be hiccupped but not damage.
5.4 OVER CURRENT PROTECTION	1.4A MAX. The power supply shall be hiccupped when output current reaches to its over current protection trigger point.

NOTE : WHEN PROTECTION CIRCUIT IS WORKING THE POWER SUPPLY WILL HICCUPPED, ONCE THE ABNORMAL CONDITIONS ARE REMOVED. THE POWER SUPPLY WILL RESTART AUTOMATICALLY.

## 6. SAFETY AND EMI REQUIREMENT :

### 6.1 SAFETY REQUIREMENT

a. SAFETY : UL/CB/GS/SAA/PSE/LVD/CCC

b. DIELECTRIC STRENGTH :5mA Max. CUT OFF CUREN

(1):PRIMARY TO SECONDARY	3000Vac FOR 1 MINUTE
(2):PRIMARY TO FRAME GROUND	3000Vac FOR 1 MINUTE

c. INSULAION RESISTANCE :

(1):PRIMARY TO SECONDARY	50 M OHMS min FOR 500Vdc
(2):PRIMARY TO FRAME GROUND	50 M OHMS min FOR 500Vdc

d. LEAKAGE CURRENT :

(1) : 100VAC / 60HZ	< 0.25 mA
(2) : 240VAC / 50HZ	< 0.25 mA

### 6.2 EMI/EMS REQUIREMENT

a. EMI : FCC CLASS B / EN55022 CLASS B; CONDUCTED & RADIATED MEETED

b. Electron Static Discharge(ESD) :

Applicable Standard	CONDITION	SPECIFICATION
IEC/EN 61000-4-2	Contact discharge performance is 4KV; Air discharge performance is 8KV	Normal operation shall be continued

# Shenzhen Sunlight Electronic CO.,LTD

## SPECIFICATION FOR APPROVAL

c. Lightning Surge :

Applicable Standard	CONDITION	SPECIFICATION
IEC/EN 61000-4-5	+/- 1KV (Line to Line) +/- 2KV (Line to Ground)	Normal operation shall be continued

d. Electric Fast Transients :

Applicable Standard	CONDITION	SPECIFICATION
IEC/EN 61000-4-4	+/-1KV for Power Supply Line	Normal operation shall be continued

## 7. OPERATION & ENVIRONMENT PERFORMANCE:

### 7.1 TEMPERATURE RANGE

OPERATING	-10°C ~ +40°C
STORAGE	-40°C ~+70°C

### 7.2 HUMIDITY RANGE (NON CONDENSING)

OPERATING	10% ~ 90% RH
STORAGE	5% ~ 95% RH

### 7.3 Product operating/storage test requirement :

TEST ITEM	CONDITION	SPECIFICATION
<b>High Temperature Storage TEST</b>	70 degree C for 72H	There is no malfunction and deformation to be found after TEST.
<b>High Temperature Operation TEST</b>	40 degree C for 16H	There is no malfunction and deformation to be found after TEST.
<b>LowTemperature Storage TEST</b>	-20 degree C for 72H	There is no malfunction and deformation to be found after TEST.
<b>Low Temperature Operation TEST</b>	0 degree C for 16H	There is no malfunction and deformation to be found after TEST.

# Shenzhen Sunlight Electronic CO.,LTD

## SPECIFICATION FOR APPROVAL

<b>Termal Shock Operation TEST</b>	Apply 2 cycle from 0 degree C to +40 degree C as 24 Hours as 1 cycle	There is no malfunction and deformation to be found after TEST.
<b>Termal Shock Storage TEST</b>	Apply 2 cycle from -20 degree C to +70 degree C as 2 Hours as 1 cycle	There is no malfunction and deformation to be found after TEST.

7.4 COOLING : SHOULD OPERATE WITHOUT FAN

7.5 M.T.B.F. : 50000 HOURS Min ; 25°C SEE CONDITION

### 8. MECHANICAL REQUIREMENT :

8.1 DIMENSION : 81.5(D)\*50.0(W)\*34.5(T)

8.2 DROP TEST : From a height of 100cm onto concrete or similar material.  
No impairment of normal function, breaking away of any parts or change

8.3 VIBRATION TEST : Non-operating but with packing. Shock acceleration 50 G, sin, 100Ms.  
Directions of force : X , Y , Z . One time at 6 directions. There is no malfunction and deformation to be found after TEST.

8.4 APPEARANCE : There shall not be any remarkable defects such as clack, distortion, uneven color, dirty nameplate and its peeling

8.5 Tensile Strength of the Cord : A static load of 100N is applied to the cord for 1 minute  
The cord should not be deteriorated


8.6 Cord Bending TEST : Hang the specified weight and swing it to one direction and return to the original position, then swing to the opposite direction and return to the original position .The strain relief shall be subjected to the specified cycles and speed. Weight 200 (g), Angle  $\pm 60$  degree, 800 times, Cycles in every minute 30, Distance 300mm.

### 9. PRODUCT GUARANTEE : AFTER SHIPMENT 12 MONTHS.

# Shenzhen Sunlight Electronic CO.,LTD

## SPECIFICATION FOR APPROVAL

### 10. PRODUCT OUTLINE DRAWING:

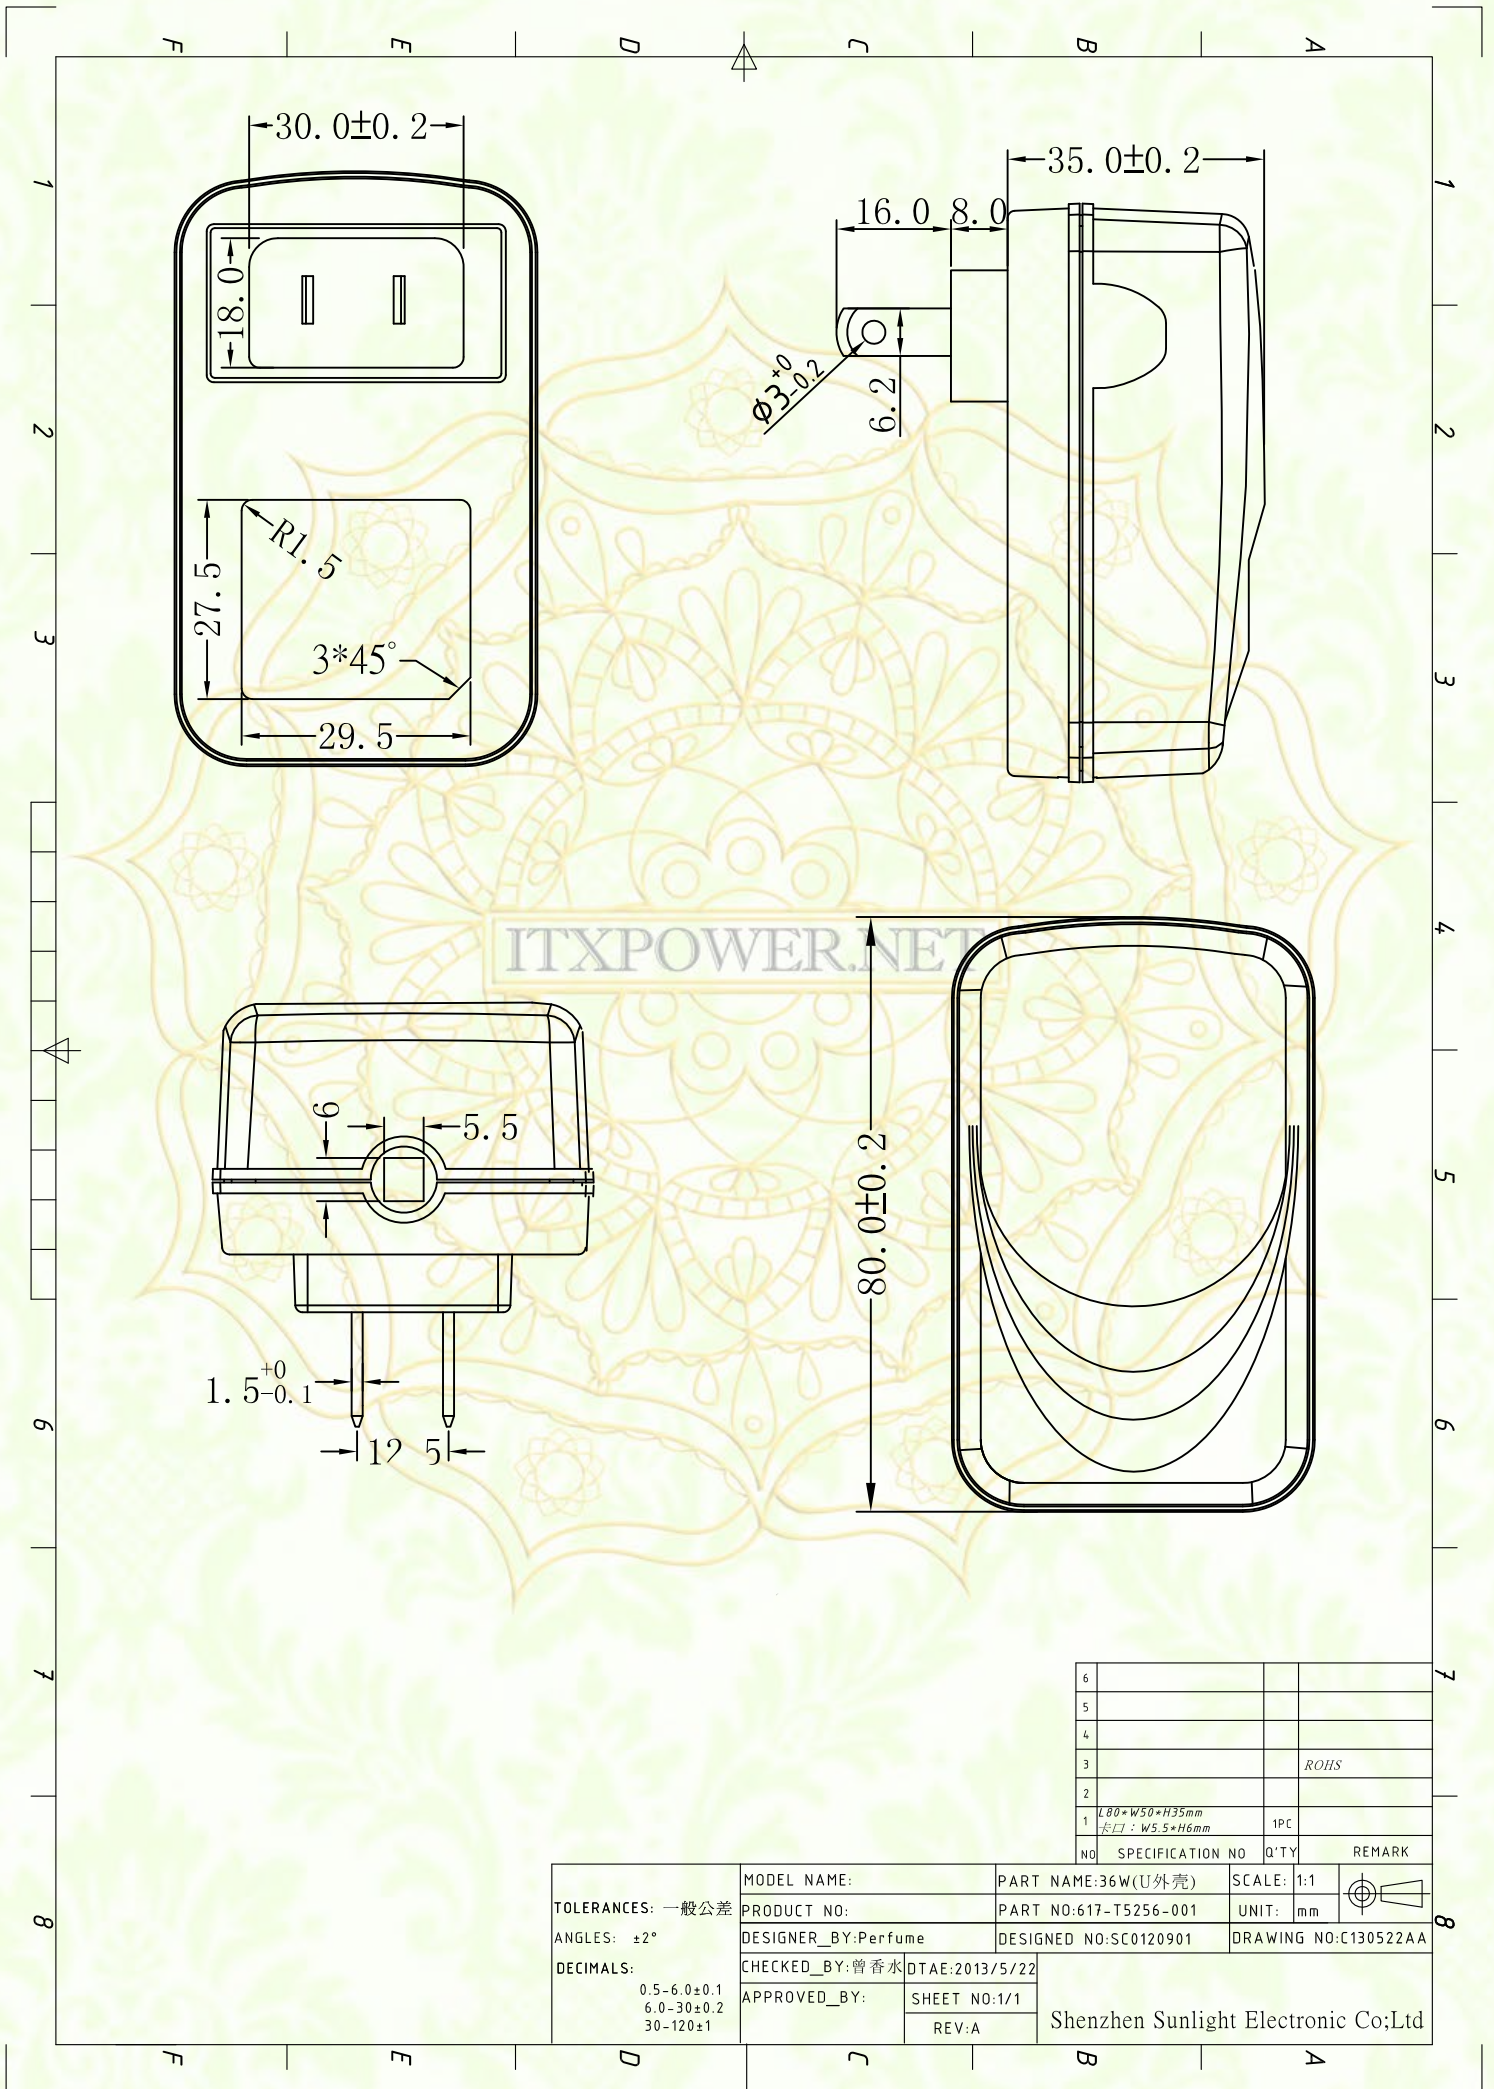

ITXPOWER.NET

6			
5			
4			
3			ROHS
2			
1	L80*W50*H35mm FET: W5.5*H6mm	1PC	
NO	SPECIFICATION NO	QTY	REMARK

<b>TOLERANCES:</b> 一般公差 <b>ANGLES:</b> $\pm 2^\circ$ <b>DECIMALS:</b> 0.5-6.0 $\pm 0.1$ 6.0-30 $\pm 0.2$ 30-120 $\pm 1$	MODEL NAME:	PART NAME:36W(U外壳)	SCALE: 1:1	
	PRODUCT NO:	PART NO:617-T5256-001	UNIT: mm	
	DESIGNER_BY:Perfume	DESIGNED NO:SC0120901	DRAWING NO:C130522AA	
	CHECKED_BY:曾香水	DATE:2013/5/22		
	APPROVED_BY:	SHEET NO:1/1	Shenzhen Sunlight Electronic Co;Ltd	
		REV:A		



# Shenzhen Sunlight Electronic CO.,LTD

## SPECIFICATION FOR APPROVAL

### 11. DC OUTPUT CORD DRAWING:



Image is loading.....

95%

图片正在加载中.....


<b>TOLERANCES:</b> 一般公差 <b>ANGLES:</b> ±2° <b>DECIMALS:</b> 0.5-6.0±0.1 6.0-30±0.2 30-120±1	MODEL NAME:		PART NAME:DC线		SCALE: 1:1	
	PRODUCT NO:		PART NO:502-T2415-059		UNIT: mm	
	DESIGNER_BY:Perfume		DESIGNED NO:SW0160203		DRAWING NO:W16021HA	
	APPROVED_BY:	SHEET NO:1/1		Shenzhen Sunlight Electronic Co;Ltd		
	REV:A					

4			
3	线卡尺寸: W 5.4*H5.9mm	1PCS	与36W外壳新卡口配合
2		1PCS	BLACK
1		1PCS	
NO	SPECIFICATION NO	Q'TY	REMARK

# Shenzhen Sunlight Electronic CO.,LTD

## SPECIFICATION FOR APPROVAL

### 12. RATING LABEL DRAWING :

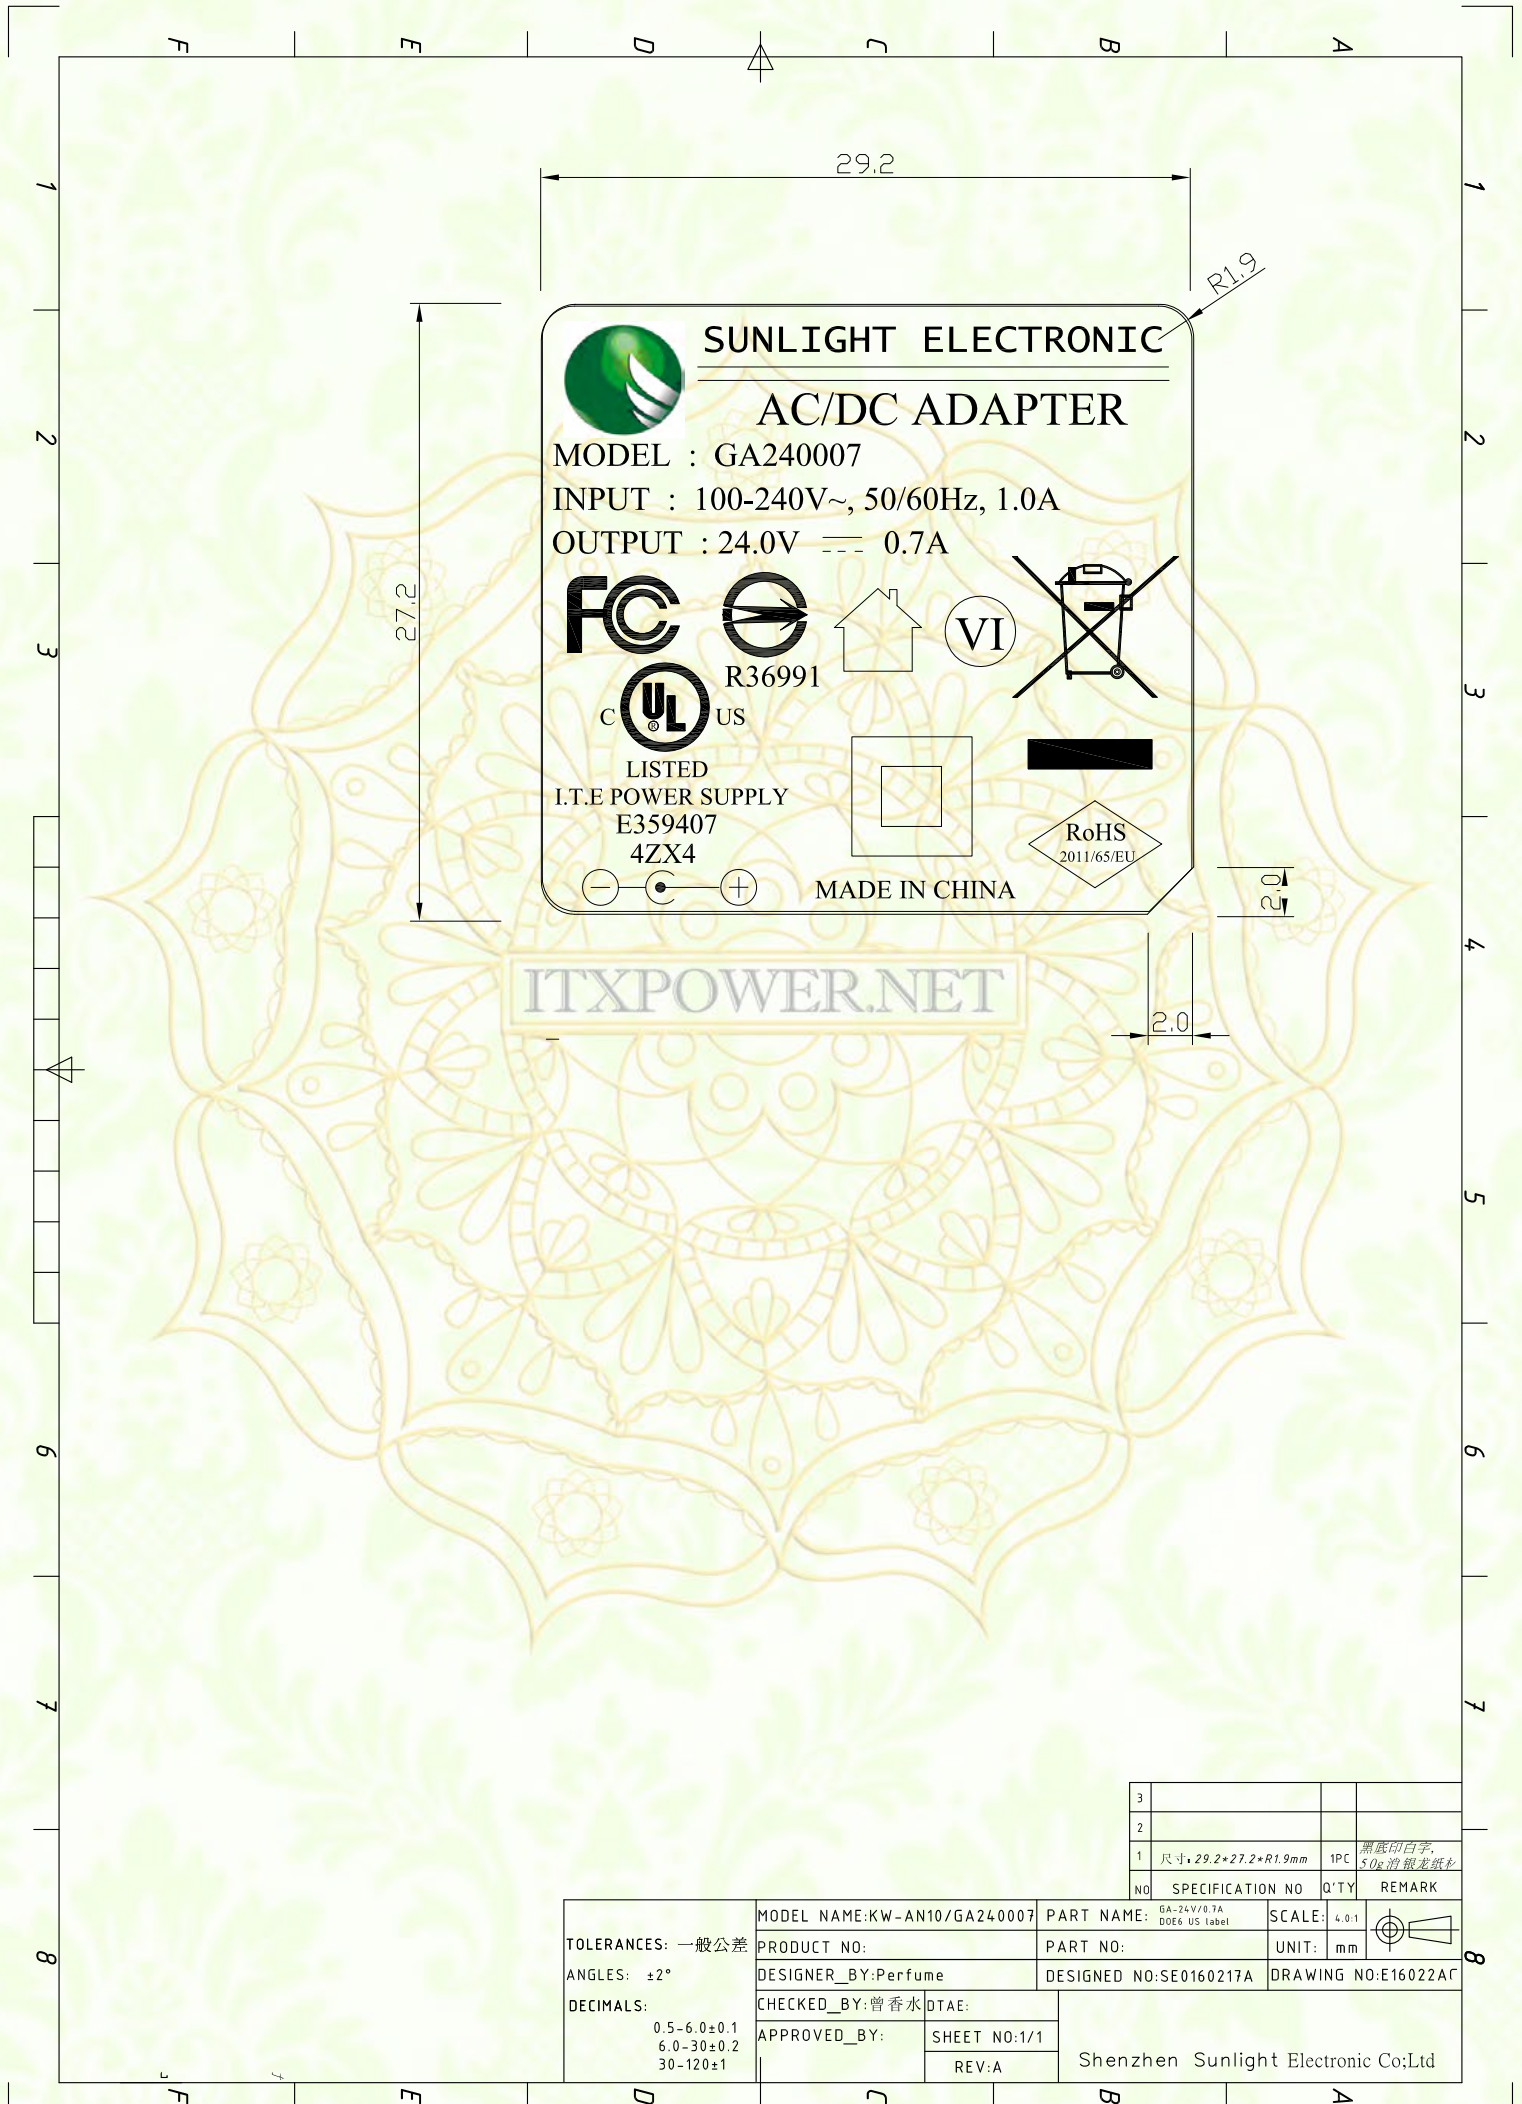

# Shenzhen Sunlight Electronic CO.,LTD

## SPECIFICATION FOR APPROVAL

### 13. PCB LAYOUT :

Image is loading.....

95%



图片正在加载中.....

ITXPOWER.NET

# Shenzhen Sunlight Electronic CO.,LTD


## SPECIFICATION FOR APPROVAL

### 14.TEST REPORT:

电源适配器样品测试报告										
客 户	32016424025316	客户编号				室 温		25℃		
产品型号	GA240007	产品编号		SAD1512-20		日 期		2015. 01. 6		
输入电压/频率	100Vac-240Vac 50/60Hz			输出电压/电流			24V 0.7A			
测试内容		1#样机				2#样机				判定
测试项目	测试标准	90V	100V	240V	264V	90V	100V	240V	264V	PASS/NG
空载电压	22.80V-25.20V	24.18	24.18	24.18	24.18	/	/	/	/	PASS
空载纹波与噪声	≤240mV	56	50	57	53	/	/	/	/	PASS
满载电压	22.80V-25.20V	23.92	23.92	23.92	23.92	/	/	/	/	PASS
满载纹波与噪声	≤240mV	108	108	106	106	/	/	/	/	PASS
最大输入电流	<1000mA	369	323	149	129	/	/	/	/	PASS
短路保护	无损坏, 可恢复 OK/NG	OK	OK	OK	OK	/	/	/	/	PASS
过流保护	>0.84A <1.4A	0.91	0.92	1.12	2.13	/	/	/	/	PASS
过压保护 (光耦开环)	<1V/满负载	OK	OK	OK	OK	/	/	/	/	PASS
启动延迟时间	< 4 s	3	2.8	2	2	/	/	/	/	PASS
输出保持时间	> 10 ms	√	√	√	√	/	/	/	/	PASS
上升时间	< 20 ms	16.5	15.9	15.3	15.1	/	/	/	/	PASS
下降时间	< 30 ms	26.3	27.7	25.9	26.9	/	/	/	/	PASS
开机过冲	< 5 %	0	0	0	0	/	/	/	/	PASS
雷击电压	共模: (L/N-GND)	± 2KV			差模: (L-N)		± 1KV			PASS
绝缘强度测试	AC3.0KV 60S	< 5mA	泄漏电流 0.6mA: 绝缘击穿: <input type="checkbox"/> 有 <input checked="" type="checkbox"/> 无							PASS
绝缘阻抗测试	DC500V 60S	>100MΩ	绝缘阻抗 100MΩ: 绝缘击穿: <input type="checkbox"/> 有 <input checked="" type="checkbox"/> 无							PASS
泄漏电流测试	264V	<0.25mA	泄漏电流 0.06mA							PASS
能效测试	平均效率 > 84.682% 空载功耗 < 0.10W	输入电压	100%	75%	50%	25%	平均效率	10%负载效率 > 74.682%	空载输入功耗	PASS
		115Vac	85.68%	85.22%	85.03%	84.46%	85.09%	79.56%	0.05W	PASS
		230Vac	86.41%	85.91%	85.03%	82.91%	85.06%	75.81%	0.08W	PASS
DC输出短路30分钟	264V输入	短路30分不损坏: <input checked="" type="checkbox"/> OK <input type="checkbox"/> NG: 可恢复工作: <input checked="" type="checkbox"/> OK <input type="checkbox"/> NG							PASS	
90V/264V输入时满载开关机测试	各10次	正常开机: <input checked="" type="checkbox"/> OK <input type="checkbox"/> NG							PASS	
PASS										
测 试					核 准		KIKIN			

# SPECIFICATION FOR APPROVAL

## 15. PACKING DRAWING :

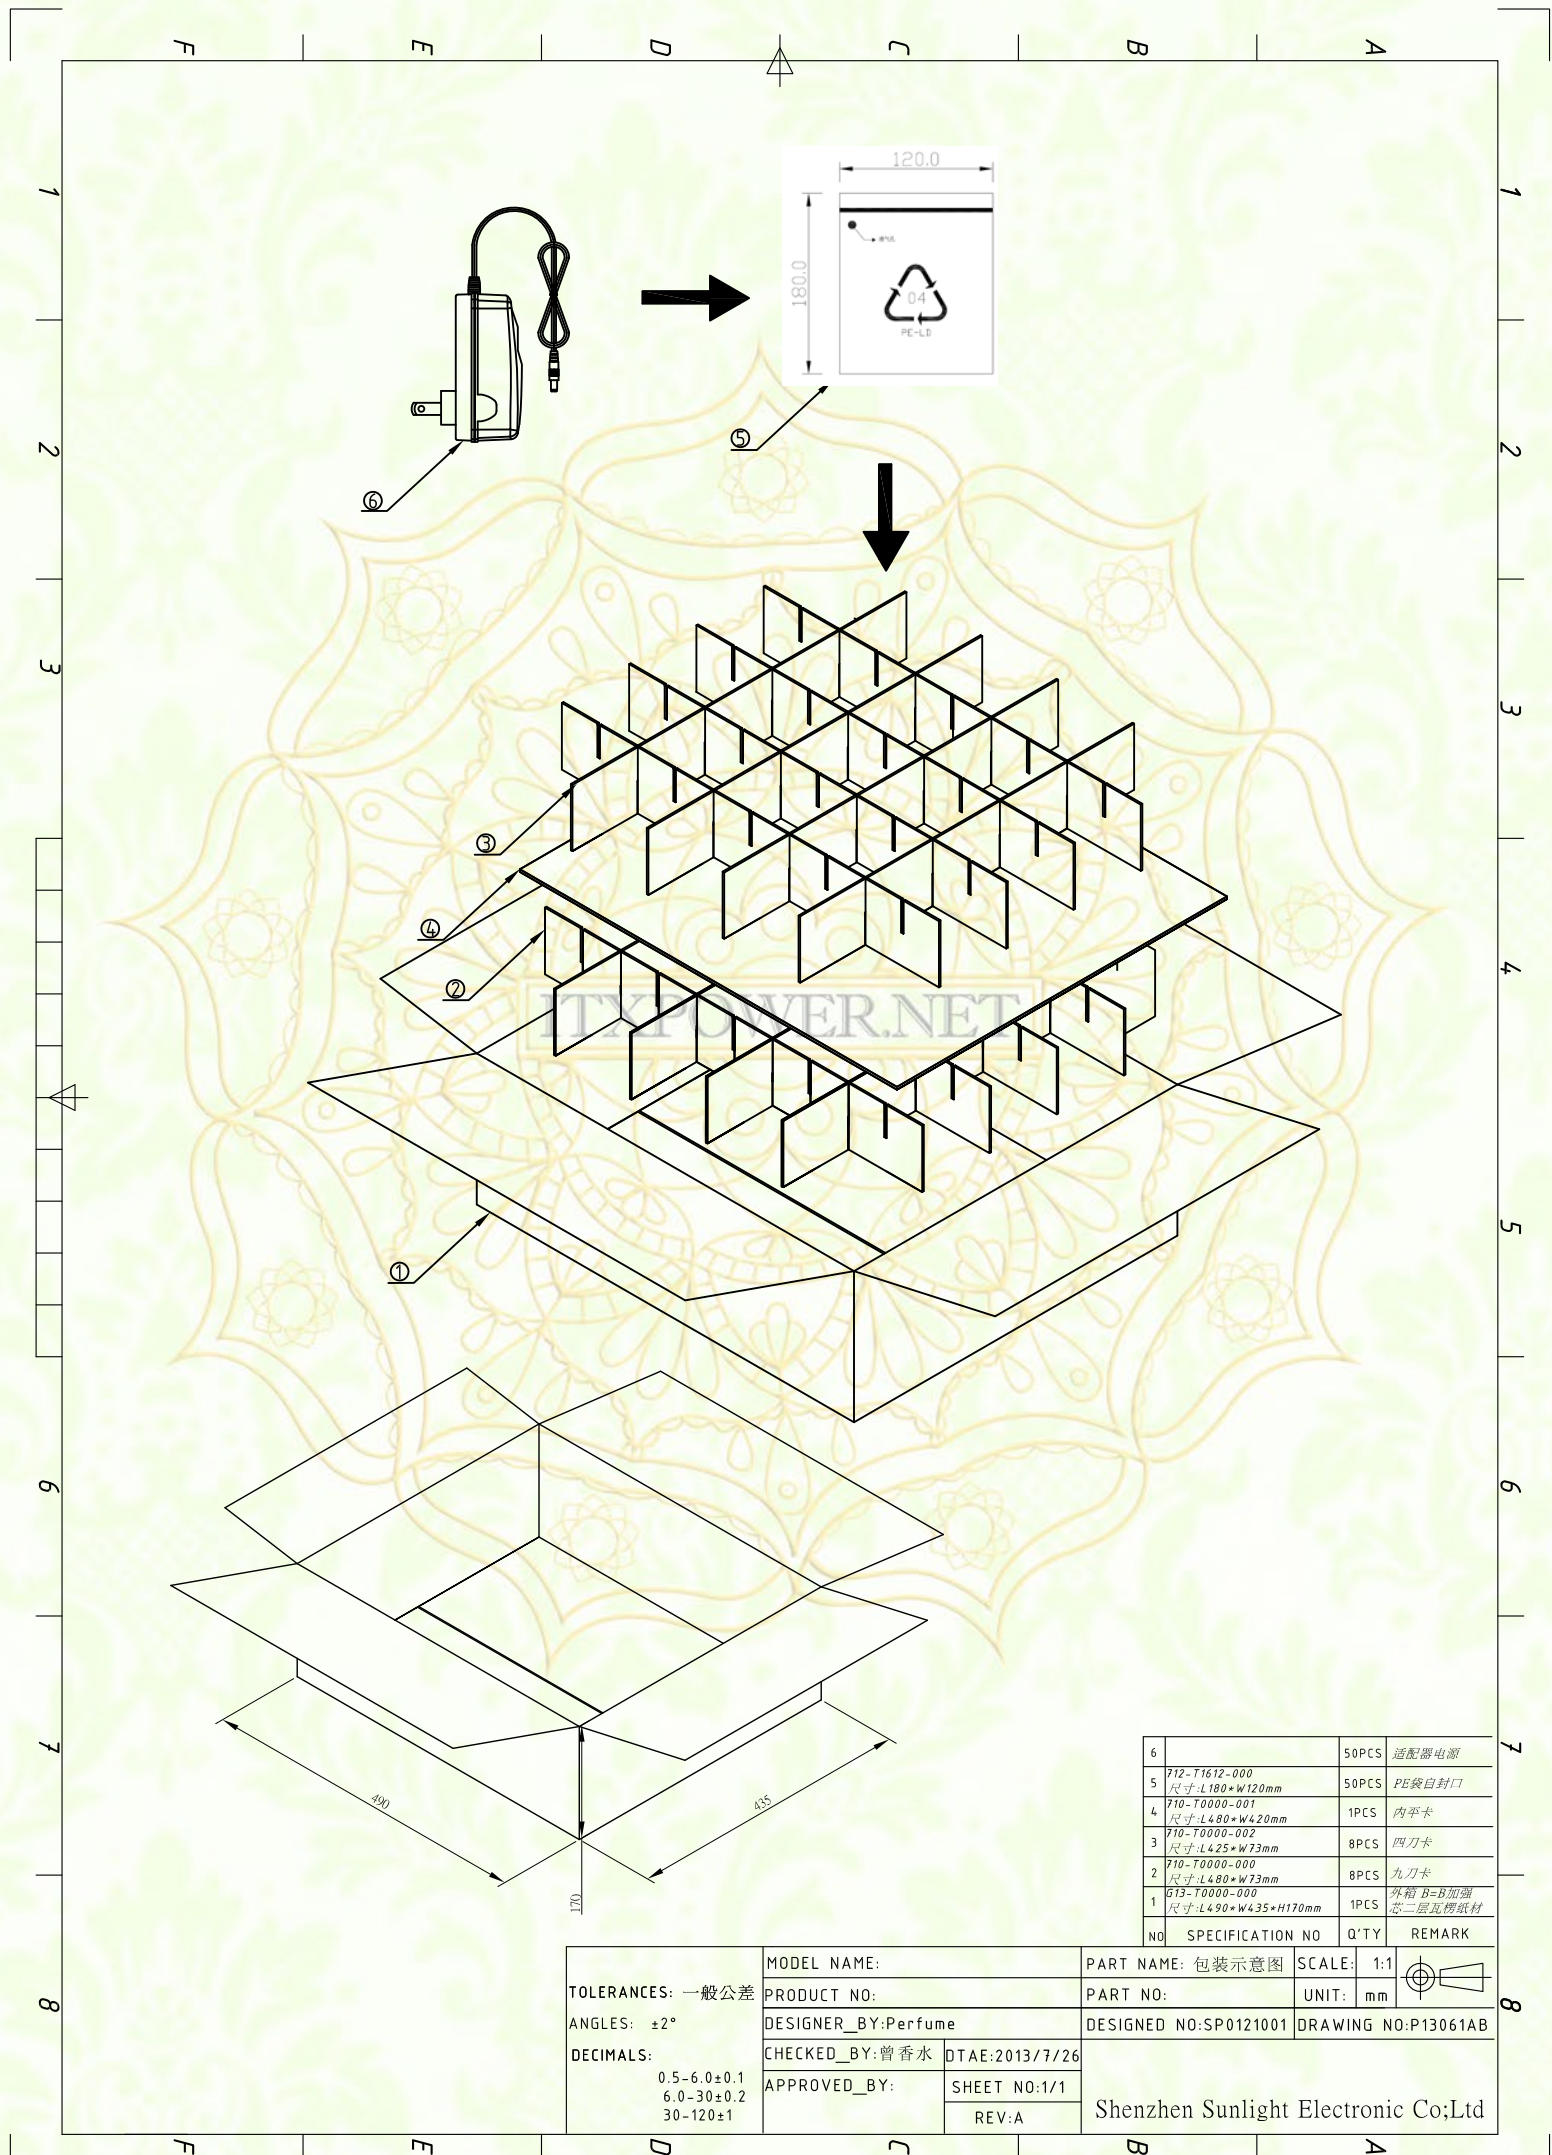

6		50PCS	适配器电源
5	F12-T1612-000 尺寸:L180*W120mm	50PCS	PE袋自封口
4	F10-T0000-001 尺寸:L480*W420mm	1PCS	内平卡
	F10-T0000-002 尺寸:L425*W73mm	8PCS	四刀卡
3	F10-T0000-000 尺寸:L480*W73mm	8PCS	九刀卡
2	G13-T0000-000 尺寸:L490*W435*H170mm	1PCS	外箱 B=加强 芯二层瓦楞纸材
1			
NO	SPECIFICATION NO	Q'TY	REMARK

<b>TOLERANCES:</b> 一般公差 <b>ANGLES:</b> ±2° <b>DECIMALS:</b> 0.5-6.0±0.1 6.0-30±0.2 30-120±1	MODEL NAME:	PART NAME: 包装示意图	SCALE: 1:1	
	PRODUCT NO:	PART NO:	UNIT: mm	
	DESIGNER_BY: Perfume	DESIGNED NO: SP0121001	DRAWING NO: P13061AB	
	CHECKED_BY: 曾香水	DATE: 2013/7/26		
APPROVED_BY:	SHEET NO: 1/1	Shenzhen Sunlight Electronic Co;Ltd		
	REV: A			

# Shenzhen Sunlight Electronic CO.,LTD

## SPECIFICATION FOR APPROVAL

16. SAFETY LICENSE : (UL+FCC)

Image is loading.....



图片正在加载中.....

ITXPOWER.NET

# Shenzhen Sunlight Electronic CO.,LTD

SPECIFICATION FOR APPROVAL

Image is loading.....



图片正在加载中.....

ITXPOWER.NET