



*Shenzhen Sunlight Electronic CO., LTD*

# 承認書

## SPECIFICATION FOR APPROVAL

PSE AC DC Adapter 20V 0.36A Power Supply Switching 360mA 20 Volt Adaptor

**CUSTOMER:** \_\_\_\_\_

**DESCRIPTION:** \_\_\_\_\_ **ADAPTER** \_\_\_\_\_

**SPECS:** \_\_\_\_\_ **20V360MA AC/DC ADAPTER** \_\_\_\_\_

**MODEL NO.:** \_\_\_\_\_ **GA200036** \_\_\_\_\_

**DATE:** \_\_\_\_\_ **June-19-2014** \_\_\_\_\_

<b>APPROVAL SIGNATURE</b>		
<b>DATE:</b>	<b>DATE:</b>	<b>DATE:</b>

**PLEASE RETURN TO US ONE COPY OF “SPECIFICATION FOR APPROVAL” WITH YOUR APPROVED SIGNATURE**

**ADD : A Area, 3F , Building B, Xinshidai Gongrong Industrial Area, NO.2, Shihuan Road, Shilong Community , Shiyan Streets, Bao'an District, Shenzhen City, Guangdong.**

**web :** [www.itxpower.net](http://www.itxpower.net)

**mail :** [15015139704@163.com](mailto:15015139704@163.com)



# SUNLIGHT ELECTRONIC CO.,LTD

## SPECIFICATION FOR APPROVAL

### 1. FEATURE :

- INPUT : UNIVERSAL 100-240 Vac/47-63 Hz INPUT, WITHOUT ANY SLIDE SWITCH
- OUTPUT : +22.0V / 0-0.4A
- DIMENSION : 56.5(D)\*37.2(W)\*24.5(H)
- EFFICIENCY : 75.0% TYPICAL
- SAFETY : UL/CB/GS/SAA/PSE/LVD
- EMI : FCC CLASS B / EN55022 CLASS B; CONDUCTED & RADIATED MEETED
- HIGH FREQUENCY DESIGN, LESS POWER CONSUMPTION
- OVER VOLTAGE PROTECTION, SHORT CIRCUITED PROTECTION, OVER POWER PROTECTION
- CAN BE USED AT TELCOMMUNICATION, COMPUTER, INDUSTRIAL CONTORLLER & OA SYSTEM

### 2. INPUT :

2.1 VOLTAGE	UNIVERSAL 100~240Vac,SINGLE PHASE
2.2 FREQUENCY	47HZ~63HZ
2.3 CURRENT	0.3A Max
2.4 INRUSH CURRENT	5A Max/100Vac;10A Max/240Vac (COLD STABT AT 25°C FULL LOAD)
2.5 EFFICIENCY	75.0% TYPICAL (AT NOMINAL LINE VOLTAGE FULL LOAD)
2.6 INPUT POWER DISSIPATION	UNDER 0.3W < ZERO LOAD 115V/60HZ INPUT
	UNDER 0.3W < ZERO LOAD 230V/50HZ INPUT

### 3. OUTPUT :

3.1 DC OUTPUT	VOLTAGE	+22.0V
	CURRENT	0.4A Max
	REGULATION	21.40V Min ~ 22.0V Typ.~ 22.60V Max
	RIPPLE & NOISE	200mV Max
	TOTAL POWER	8.8W Max

NOTE : FOR RIPPLE & NOISE MEASUREMENT, USE A 20MHZ BAND WIDTH FREQUENCY OSCILLOSCOPE, AND ADD A 0.1uF MULTILAYER CAP. AND A LOW ESR ELECTROLYTICCAP. (10uF) AT OUTPUT CONNECTOR TERMINALS. (AT NOMINAL LINE VOLTAGE FULL LOAD)

### 4. PROTECTION :

4.1 OVER VOLTAGE PROTECTION	24.8V MAX. The power supply shall be hiccupped when output voltage reaches to its over voltage protection trigger point.
4.2 SHORT CIRCUIT PROTECTION	The power supply shall be hiccupped when operating any output in a short circuit condition.

# SUNLIGHT ELECTRONIC CO.,LTD

## SPECIFICATION FOR APPROVAL

4.2 OVER POWER PROTECTION	The adapter provide protection at 120%~180% of rated output power, the adapter shall be hiccupped but not damage.
4.3 OVER CURRENT PROTECTION	0.72A MAX. The power supply shall be hiccupped when output current reaches to its over current protection trigger point.

NOTE : WHEN PROTECTION CIRCUIT IS WORKING THE POWER SUPPLY WILL HICCUPEP, ONCE THE ABNORMAL CONDITIONS ARE REMOVED. THE POWER SUPPLY WILL RESTART AUTOMATICALLY.

### 5. SAFETY AND EMI REQUIREMENT :

#### 5.1 SAFETY REQUIREMENT

a. SAFETY : UL/CB/TUV/SAA/PSE/LVD

b. DIELECTRIC STRENGTH :5mA Max. CUT OFF CURREN

(1):PRIMARY TO SECONDARY	3000Vac FOR 1 MINUTE
(2):PRIMARY TO FRAME GROUND	3000Vac FOR 1 MINUTE

c. INSULAION RESISTANCE :

(1):PRIMARY TO SECONDARY	50 M OHMS min FOR 500Vdc
(2):PRIMARY TO FRAME GROUND	50 M OHMS min FOR 500Vdc

d. LEAKAGE CURRENT :

(1) : 100VAC / 60HZ	< 0.25 mA
(2) : 240VAC / 50HZ	< 0.25 mA

#### 5.2 EMI/EMS REQUIREMENT

a. EMI : FCC CLASS B / EN55022 CLASS B; CONDUCTED & RADIATED MEETED

b. Electron Static Discharge(ESD) :

Applicable Standard	CONDITION	SPECIFICATION
IEC/EN 61000-4-2	Contact discharge performance is 4KV; Air discharge performance is 8KV	Normal operation shall be continued

# SUNLIGHT ELECTRONIC CO.,LTD

## SPECIFICATION FOR APPROVAL

c. Lightning Surge :

Applicable Standard	CONDITION	SPECIFICATION
IEC/EN 61000-4-5	+/- 1KV (Line to Line) +/- 2KV (Line to Ground)	Normal operation shall be continued

d. Electric Fast Transients :

Applicable Standard	CONDITION	SPECIFICATION
IEC/EN 61000-4-4	+/-1KV for Power Supply Line	Normal operation shall be continued

## 6. OPERATION & ENVIRONMENT PERFORMANCE:

### 6.1 TEMPERATURE RANGE

OPERATING	0°C ~ +40°C
STORAGE	-40°C ~ +70°C

### 6.2 HUMIDITY RANGE (NON CONDENSING)

OPERATING	10% ~ 90% RH
STORAGE	5% ~ 95% RH

### 6.3 Product operating/storage test requirement :

TEST ITEM	CONDITION	SPECIFICATION
<b>High Temperature Storage TEST</b>	70 degree C for 72H	There is no malfunction and deformation to be found after TEST.
<b>High Temperature Operation TEST</b>	40 degree C for 16H	There is no malfunction and deformation to be found after TEST.
<b>Low Temperature Storage TEST</b>	-20 degree C for 72H	There is no malfunction and deformation to be found after TEST.
<b>Low Temperature Operation TEST</b>	0 degree C for 16H	There is no malfunction and deformation to be found after TEST.

# SUNLIGHT ELECTRONIC CO.,LTD

## SPECIFICATION FOR APPROVAL

<b>Termal Shock Operation TEST</b>	Apply 2 cycle from 0 degree C to +40 degree C as 24 Hours as 1 cycle	There is no malfunction and deformation to be found after TEST.
<b>Termal Shock Storage TEST</b>	Apply 2 cycle from -20 degree C to +70 degree C as 2 Hours as 1 cycle	There is no malfunction and deformation to be found after TEST.

6.3 COOLING : SHOULD OPERATE WITHOUT FAN

6.4 M.T.B.F. : 30000 HOURS Min ; 25°C SEE CONDITION

### 7. MECHANICAL REQUIREMENT :

7.1 DIMENSION : 56.5(D)\*37.2(W)\*24.5(H)

7.2 DROP TEST : From a height of 100cm onto concrete or similar material.  
No impairment of normal function, breaking away of any parts or change

7.3 VIBRATION TEST : Non-operating but with packing. Shock acceleration 50 G, sin, 100Ms.  
Directions of force : X , Y , Z . One time at 6 directions. There is no malfunction and deformation to be found after TEST.

7.4 APPEARANCE : There shall not be any remarkable defects such as clack, distortion, uneven color, dirty nameplate and its peeling

7.5 Tensile Strength of the Cord : A static load of 100N is applied to the cord for 1 minute  
The cord should not be deteriorated

7.6 Cord Bending TEST : Hang the specified weight and swing it to one direction and return to the original position, then swing to the opposite direction and return to the original position .The strain relief shall be subjected to the specified cycles and speed. Weight 200 (g), Angle  $\pm 60$  degree, 1000 times, Cycles in every minute 30, Distance 300mm.

### 8. PRODUCT GUARANTEE : AFTER SHIPMENT 12 MONTHS.

# SUNLIGHT ELECTRONIC CO.,LTD

## SPECIFICATION FOR APPROVAL

### ( I ). LINE REGULATION TEST

Test result:

Test condition	Spec.	Reading1	Reading2	Reading3
90Vac / 50% load	21.4~22.6V	22.01V		
115Vac / 50% load	21.4~22.6V	22.01V		
132Vac / 50% load	21.4~22.6V	22.01V		
180Vac / 50% load	21.4~22.6V	22.01V		
230Vac / 50% load	21.4~22.6V	22.01V		
264Vac / 50% load	21.4~22.6V	22.01V		

### (II). EFFICENCY TEST

Test result:

Test condition	Spec.	Reading1	Reading2	Reading3
115Vac / 100% load	75.0% Typical	75.8%		
230Vac / 100% load	75.0% Typical	76.3%		

### (III). LOAD REGULATION TEST

Test result:

Test condition	Spec.	Reading1	Reading2	Reading3
115Vac / 0% load	21.4~22.6V	22.05V		
115Vac / 50% load	21.4~22.6V	22.01V		
115Vac / 100% load	21.4~22.6V	21.99V		
230Vac / 0% load	21.4~22.6V	21.05V		
230Vac / 50% load	21.4~22.6V	22.01V		
230Vac / 100% load	21.4~22.6V	21.99V		

### (IV). RIPPLE & NOISE TEST

Test result:

Test condition	Spec.	Reading1	Reading2	Reading3
115Vac / 100% load	200mV Max	160mV		
230Vac / 100% load	200mV Max	150mV		

# SUNLIGHT ELECTRONIC CO.,LTD

## SPECIFICATION FOR APPROVAL

### (VI). OVER VOLTAGE PROTECTION

Test result:

Test condition	Spec.	Reading1	Reading2	Reading3
115Vac / 100% load	Vout*(24.8V MAX)	OK		
230Vac / 100% load	Vout*(24.8V MAX)	OK		

### (VII). RISE TIME

Test result:

Test condition	Spec.	Reading1	Reading2	Reading3
115Vac / 100% load	50mS Max	31mS		
230Vac / 100% load	50mS Max	18mS		

ITXPOWER.NET

### (VIII). OVER CURRENT PROTECTION

Test result:

Test condition	Spec.	Reading1	Reading2	Reading3
115Vac / 100% load	Iout*(120%~180%)	138%		
230Vac / 100% load	Iout*(120%~180%)	163%		

### (IX). SHORT CIRCUIT PROTECTION

Test result:


Test condition	Spec.	Reading1	Reading2	Reading3
115Vac / 100% load	Under 1.0W	OK		
230Vac / 100% load	Under 1.0W	OK		



# SUNLIGHT ELECTRONIC CO.,LTD

## SPECIFICATION FOR APPROVAL

**Appearance and size(unit : mm) :** The housing is in black color. The appearance should be even, clear, no scar, no burr And Mechanical damages. There is no rust with the outer metal. The connector and Connector Plugs pin should be connect with the wire firmly. There is no looseness and fall. The housing should be fastness with ultrasonically welding.

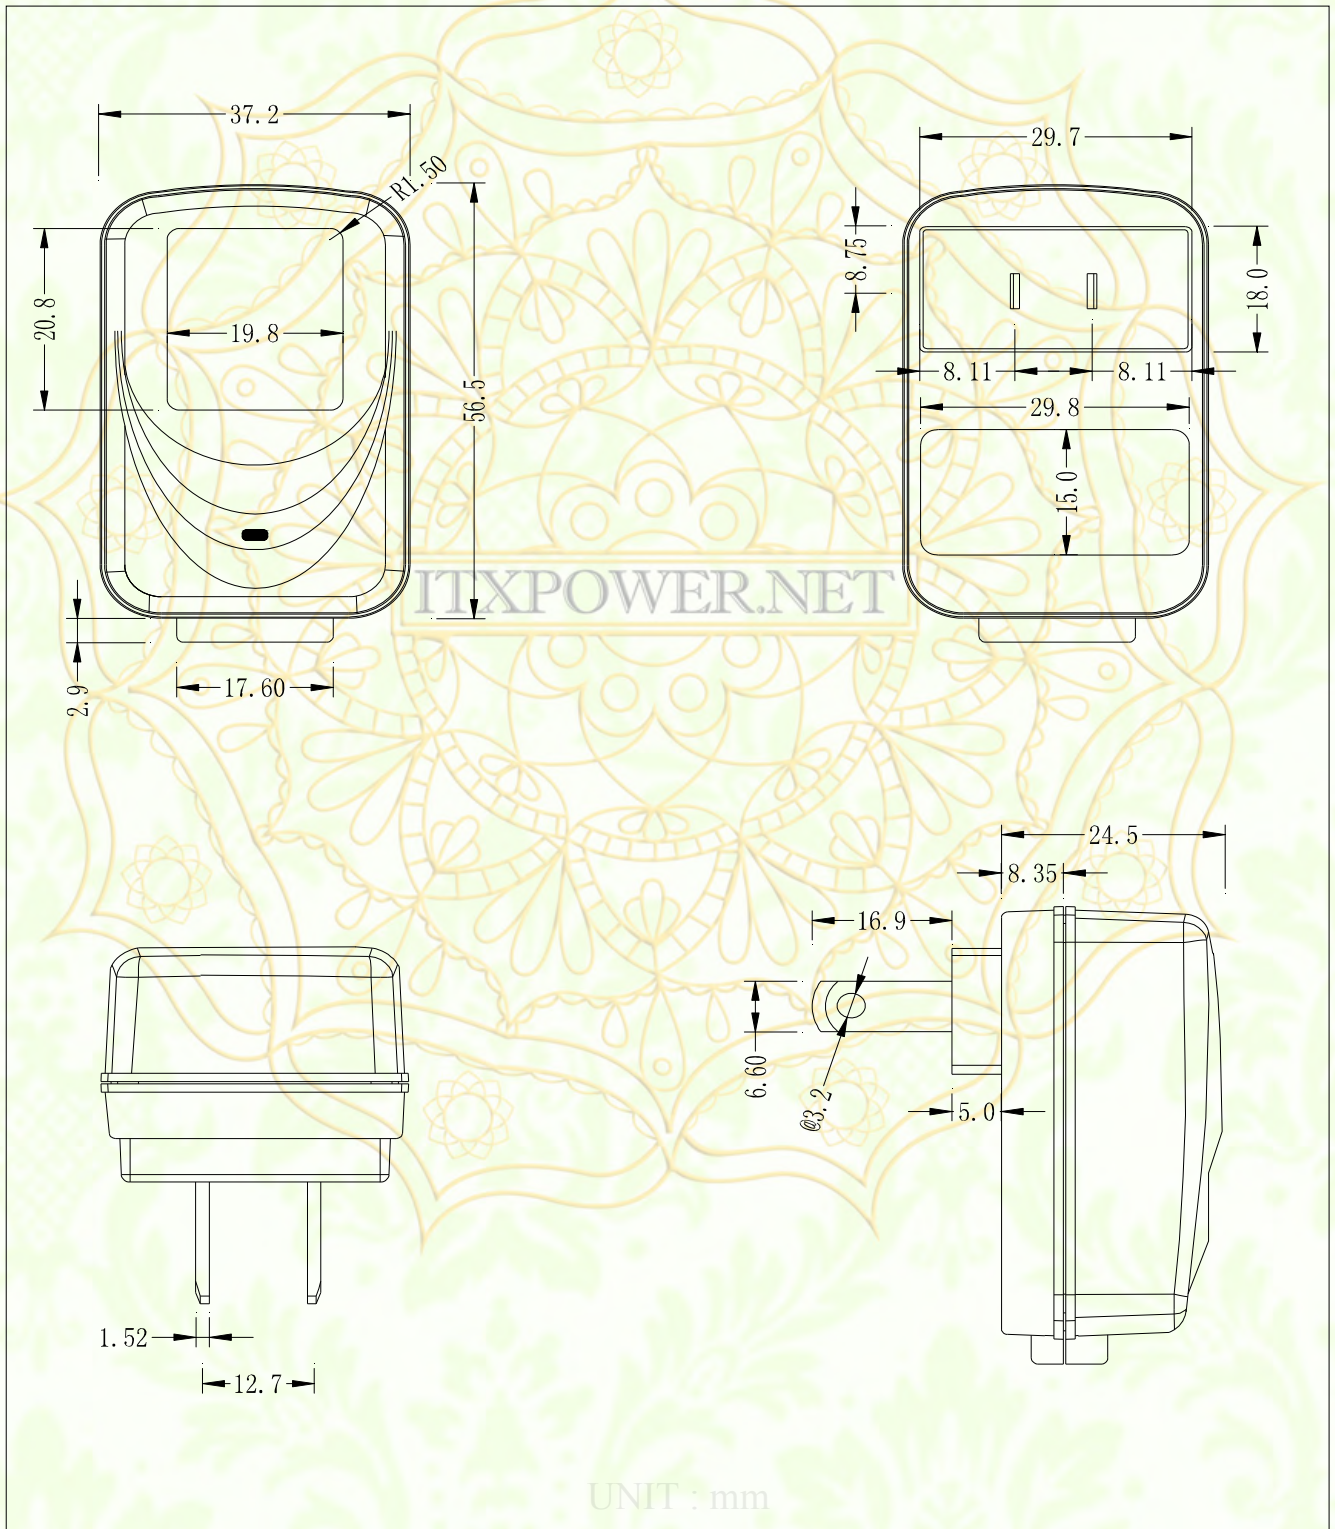

UNIT : mm

# SUNLIGHT ELECTRONIC CO.,LTD

## SPECIFICATION FOR APPROVAL

Output Wire and Connector:



# SUNLIGHT ELECTRONIC CO.,LTD

## SPECIFICATION FOR APPROVAL

**JP LABEL : (UNIT : mm)**

